

JP125S

125,000 lb Towing Capacity



### Standard Features:

- Sit down model
- Power steering
- Heavy duty long life torque hubs
- Regenerative motor braking on deceleration
- Programmed electric motor braking with brake pedal
- Automatic parking brake
- Controlled acceleration and deceleration foot operated throttle
- 2 drive motors coupled directly to torque hubs result in fewer moving parts
- Aircraft selection system to limit torque
- Oversteer (over-torque) protection system
- Proportional drive with steering position sensor
- Rear suspension system
- Battery charge indicator with hourmeter
- 72 volt 440AH battery system
- Wheel tie down strap
- Nylon winch strap
- Nylon strut straps
- Winch system with safety switch
- Emergency safety cut off switch
- Hydraulic system filtration

- Solid rubber tires
  - 22 in front drive tires
  - 18 in rear steer tires
- Pintle hitch (rear)
- Fire extinguisher
- LED forward and rear facing lights
- Strobe light
- 4 LED marker lights
- Horn
- Finish: Durable Powder Coat Tronair Blue

### Optional Equipment:

- Waterproof cradle camera with 7" display for improved capture visibility
- Fully automated, battery charger
- Brake lights/turn signals
- Battery watering system
- Aircraft adapters
- Custom colors and graphics

[www.jetporter.com](http://www.jetporter.com)

1.800.426.6301

[www.tronair.com](http://www.tronair.com)

USA

Email: [sales@tronair.com](mailto:sales@tronair.com)

Tel: 419-866-6301

Asia

Email: [tronairasia@tronair.com](mailto:tronairasia@tronair.com)

Tel: 662 2121463

Australia/New Zeland

Email: [cjones@tronair.com](mailto:cjones@tronair.com)

Tel: 61 2 4028 6981

China/Hong Kong/Macau/Taiwan

Email: [nyao@tronair.com](mailto:nyao@tronair.com)

Tel: 86 137 6450 1982

Europe

Email: [jnunn@tronair.com](mailto:jnunn@tronair.com)

Tel: 44 (0) 11 332 0436


Middle East, Africa, CIS

Email: [hkarvani@tronair.com](mailto:hkarvani@tronair.com)

Tel: 44 (0) 11 332 0436

# JP125S

125,000 lb Towing Capacity

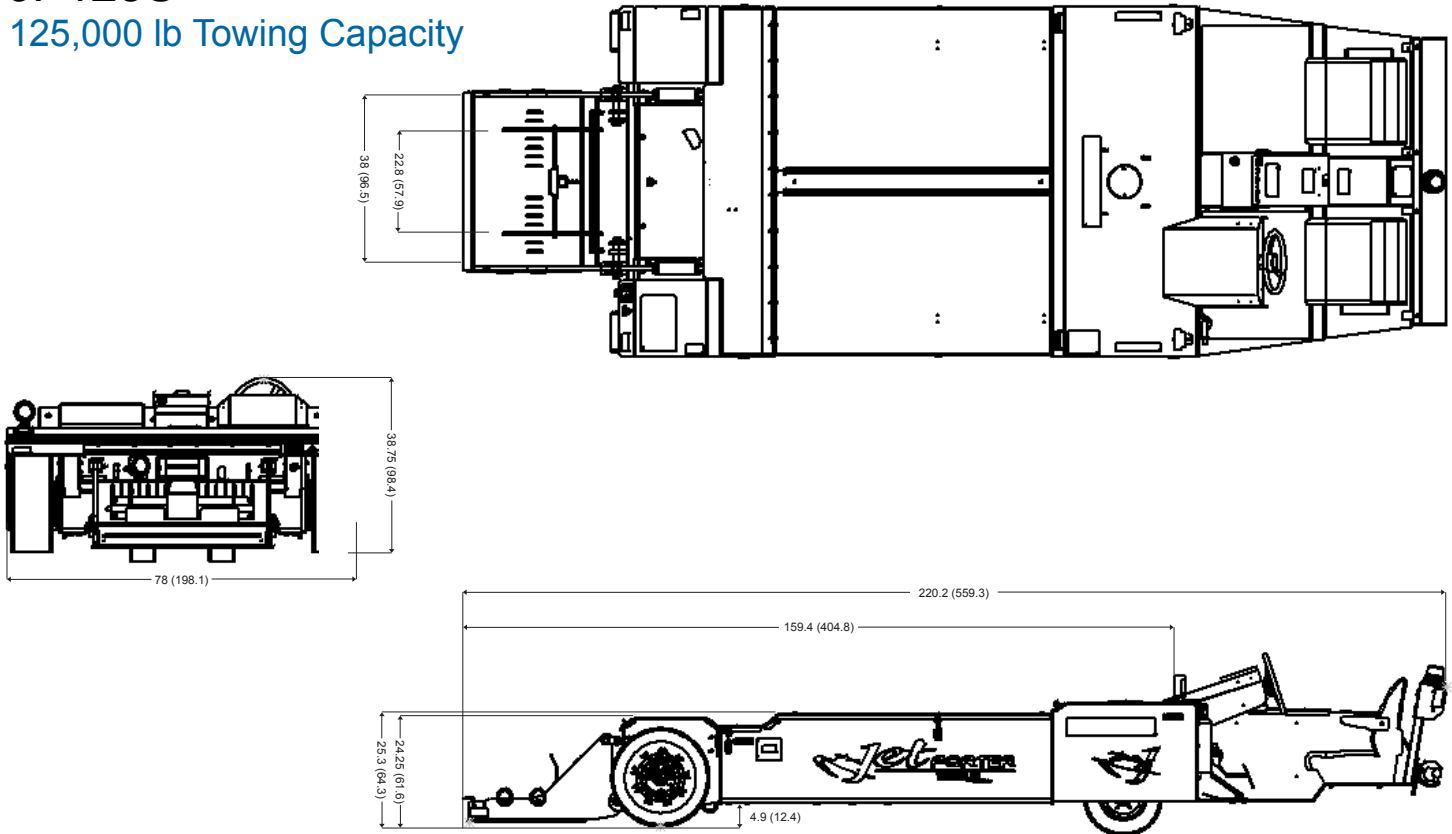

	MODELS	JP125S
PERFORMANCE	Towing Capacity	125,000 lb (45,359 kg)
	Cradle Capacity	12,500 lb (4,536 kg)
	Empty Speed	7.5 mph (12 kph)
	Full Load Speed	3 mph (4.8 kph)
POWER	Motor Horsepower	26 HP (110 HP peak)
	Motor Duty Cycle	Continuous
	Battery Type	Two - 36 volt industrial 440 AH
	Charge Time Full Discharge	8 hour average
DIMENSIONS	Length	220.2 in (559.3 cm)
	Width	78 in (198 cm)
	Height	38.75 in (98.8 cm)
	Weight with Battery	9,500 lb (4,309 kg)
	Weight without Battery	6,580 lb (2,985 kg)
	Ground Clearance	4.9 in (12.4 cm)
	Deck Height	25.3 in (64.3 cm)
	Cradle Depth	25.9 in (65.9 cm)
	Cradle Width	40 in (101.6 cm)
	Cradle Lift Height	12.5 in (31.75 cm)
CHASSIS	Steering Tires	18 x 7 x 8
	Drive Tires	22 X 9 X 16
	Brakes	Dynamic motor braking
	Parking Brake	Automatic activated/deactivated

TA030116